

# RoofClamp




(800) 766-5291  
 (717) 737-4398  
 www.SNOJAX.com

Patent#: US D629,679




Made in USA

Patent#: US D658,977

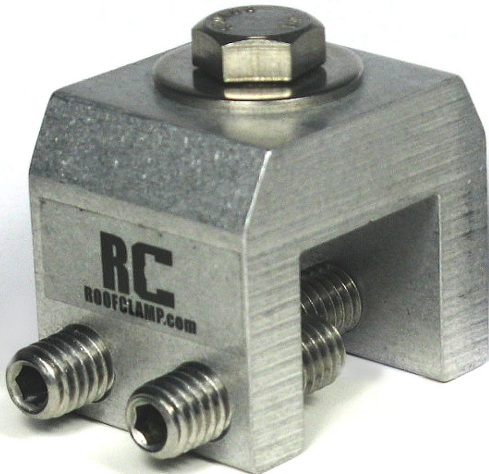


RoofClamp™ RC

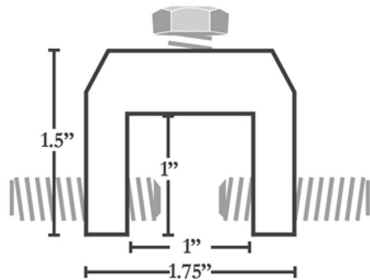

\* Interior dimension measures 1" W. x 1" H.  
 \* 1.375" Length.




RoofClamp™ RCT

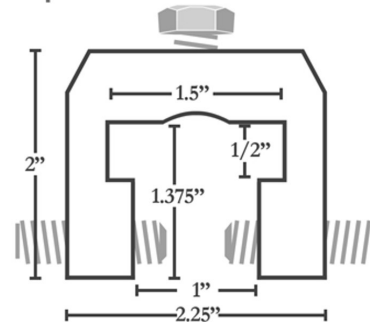

\* The RCT can accommodate "T" seams up to 1.5" wide.  
 \* Interior dimensions measure 1" W x 1.375" H  
 \* .5" H x 1.5" W seam channel.  
 \* 1.375" Length.

## Call Today For A Quote!

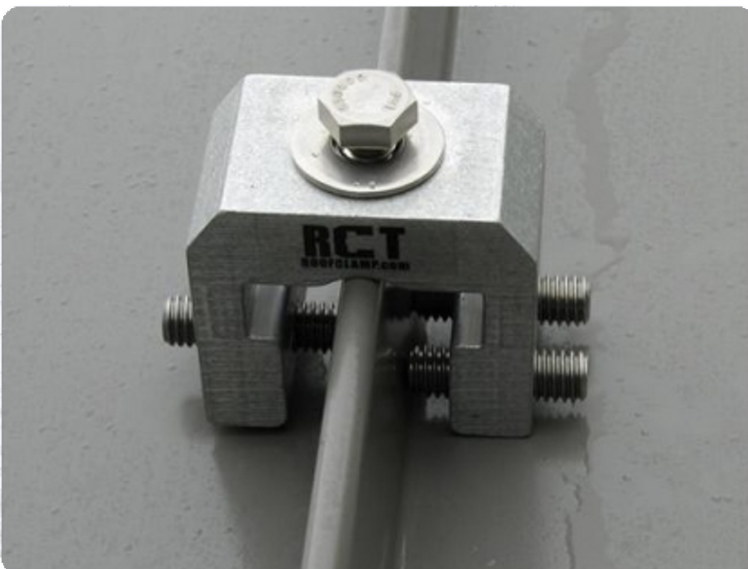

Secure solar panels, satellite dishes, roof walks, conduit, HVAC lines and attach signs or awnings. The aluminum RoofClamp utilizes a Stainless Steel oval tipped screw that does not pierce or penetrate the panel; therefore it will not void the manufacturer warranty. The attachment of the clamp is one piece instead of two and for extra strength, it has three set screws. This clamp does not require panel feeding which makes it fast and easy to install. Two clamps fit most seams, eliminating the need to stock many sizes. Three 1 1/4" X 3/8" cupped nose set screws lock onto the panel securely and accessories attach to the 1 3/8" threaded mounting hole on top.